
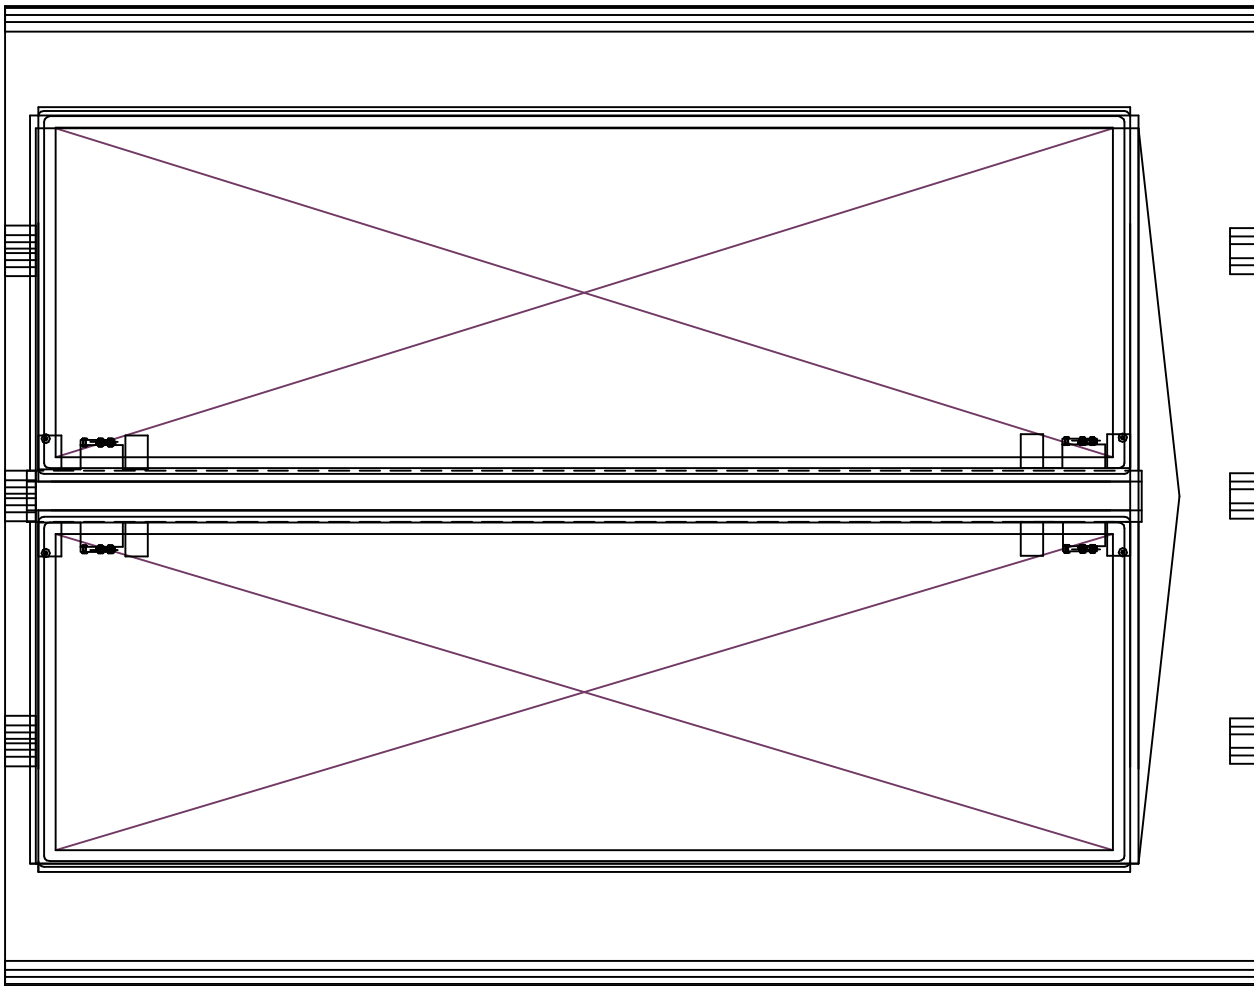
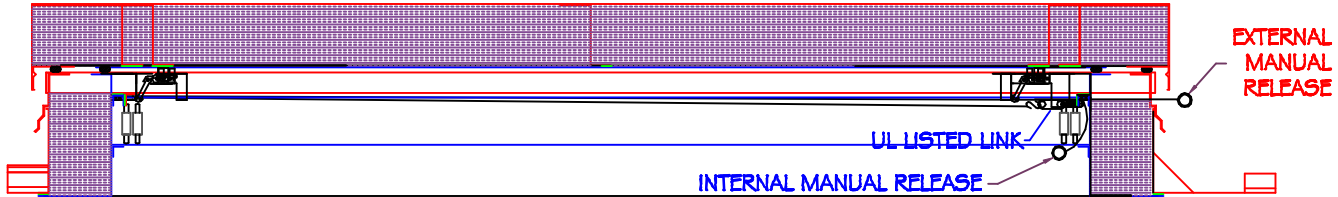


SPECIFICATIONS

1. Steel Base 14/18 GA G90 Galvanized Stl
2. Steel Lid 16 GA G90 Galvanized Steel
3. Insulation Value R 43
4. Insulation Minimum 6" Thick
5. Insulation Liner 22 GA G90 Steel
6. Full Perimeter Dulp Gaskets with Thermal Breaks
7. Hinges and Latches 12 GA G90 Galvanized Steel
8. Integral Inside and Outside Manual Releases
9. High Performance Gas Springs with Holdopen
10. UL Listed Fusible or McCabe Resettable Links
11. Zinc, CAD Plated, and Stainless Hardware
12. Lids Open against a minimum 10 PSF Load
13. Lids Remain Closed under Minimum 90 PSF Uplift
14. Lids rated for a 40 PSF Live Load

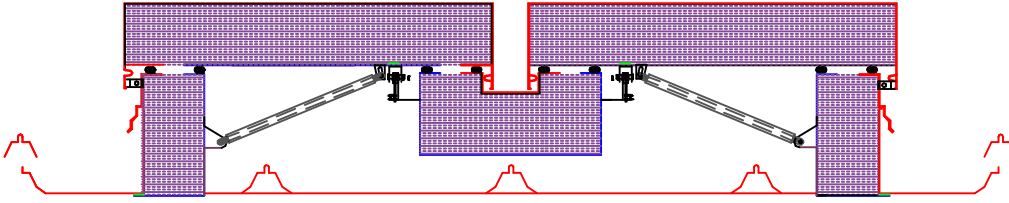

| QUANTITY | MODEL | INSIDE CURB OPENING SIZE | LIVE LOAD CAPACITY (PSF) |
|----------|-------|--------------------------|--------------------------|
| | 6060 | 60" x 60" | 10 |
| | 6072 | 60" x 72" | 10 |
| | 6090 | 60" x 90" | 10 |
| | 6096 | 60" x 96" | 10 |

| | | | | |
|------------------------------------|---------------------------------|---------------------------|------------------------------|----------------------------|
| CUSTOMER | | JOB NAME | | |
| MODEL DL5H-6096-MB-5C-165-F-R43 | | LINK TYPE FUSIBLE | LIVE LOAD CAPACITY 10 PSF | UPLIFT CAPACITY 90 PSF |
| LINK TEMP 165 F | OUTER DOME GLAZING METAL LID | INNER DOME GLAZING N/A | Date 8/15/12 | DRAWING # ULSH-1002-R43 |

R & S MANUFACTURING AND SALES CO., INC
 3575 Old Conejo Rd.
 Newbury Park, CA 91320
 (805)375-3980 fax 375-3981