

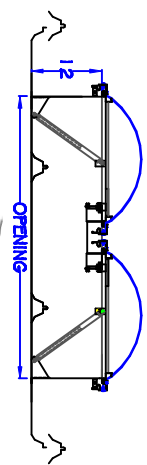



- ### SPECIFICATIONS
1. Steel Lid Frame & Base 1/8 GA. 680 Galvalume SH
 2. Aluminum Lid Frame and Base 0.003" Aluminum
 3. Outer Dome 0.11g" White Copolyester Plastic
 4. Inner Dome Clear 0.030" Plastic with Speed
 5. Full Remover Dome Caps and Longlife Screws
 6. Dome Seals and Condensate Provisions
 7. Insulation Minimum 1" Thick R7.2 when Specified
 8. Insulation Liner 22 GA. 680 Steel when Specified
 9. Full Remover Bolt Gaskets
 10. Hinges and Latches 1/2 GA. 680 Galvalume Steel
 11. Integral Inside and Outside Manual Release
 12. High Performance Gas Springs with Holdopen
 13. U/L Latched Pushes or MacCabe Reachable Links
 14. Zinc, CAD Plated, and Stainless Hardware
 15. Lid Open against a minimum 20 PSF Load
 16. Lid Remains Closed under Minimum 30 PSF Uplift
 17. Latches Rated for 90 PSF Uplift

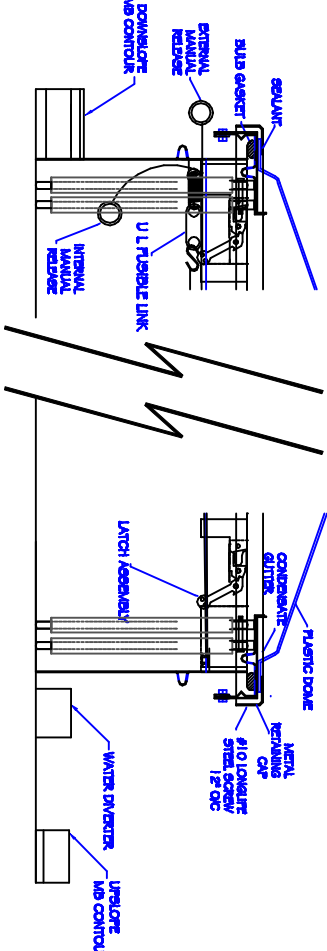

US LISTED
AUTOMATICALLY
OPERATED
ROOF VENT
20KG

QUANTITY	MODEL	NETING CLIMB OPENING SIZE (MINIMUM)	LIFT LOAD CAPACITY (PSF)
	48448	48" x 48"	40
	48966	48" x 96"	35
	6060	60" x 60"	30
	6072	60" x 72"	30
	6096	60" x 96"	20

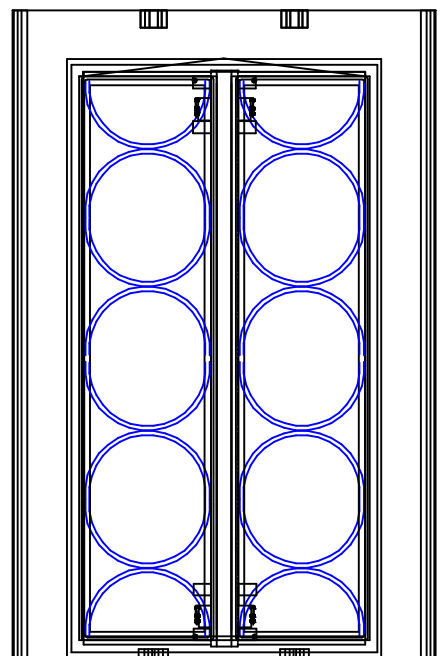

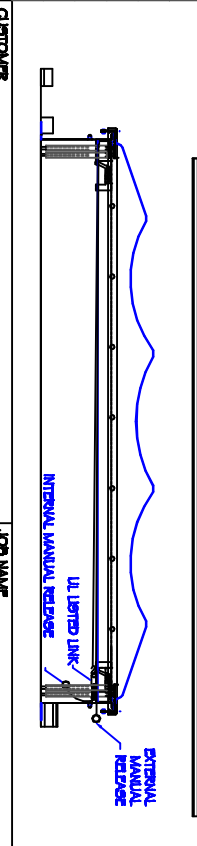R & S MANUFACTURING AND SALES CO., INC
3575 Old Conejo Rd.
Newbury Park, CA 91320
(805)375-3990
fax 375-3991

MODEL	OUTER DOME GLAZING	INNER DOME GLAZING	DATE	DRAWING #
ULSH-98A-MB-9C-1-65-F-HC	OUTER DOME GLAZING	INNER DOME GLAZING	11/05/09	ULSH-1009-HC